

NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

Page 1

Atty. Docket No. 04787.81749

Assistant Commissioner of Patents
Box Patent Applications
Washington, D.C. 20231

JCS98 U.S. PTO
09/413792
10/07/99

Enclosed herewith is a new patent application and the following papers:

First Named Inventor (or application identifier): Patrick Ross Trischitta

Title of Invention: Power Feed Arrangement Using Aggregate Segments

1. ☒ Specification 18 pages (including specification, claims, abstract) / 19 claims (3 independent)
2. ☒ Declaration/Power of Attorney is:
☒ attached in the regular manner.
☐ NOT included, but deferred under 37 C.F.R. § 1.53(f).
3. ☒ 8 Distinct sheets of ☒ Formal ☐ Informal Drawings
4. ☐ Preliminary Amendment.
5. ☐ Information Disclosure Statement
☐ Form 1449
☐ A copy of each cited prior art reference
6. ☒ Assignment with Cover Sheet.
7. ☐ Priority is hereby claimed under 35 U.S.C. § 119 based upon the following application(s):

Country	Application Number	Date of Filing (day, month, year)

8. ☐ Priority document(s).
9. ☐ Statement Claiming Small Entity Status.
10. ☐ Microfiche Computer Program (Appendix).
11. ☐ Nucleotide and/or Amino Acid Sequence Submission.
☐ Computer Readable Copy.
☐ Paper Copy (identical to computer copy).
☐ Statement verifying identity of above copies.

NEW UNITED STATES UTILITY PATENT APPLICATION
under 37 C.F.R. 1.53(b)

Page 2

Atty. Docket No. 04787.81749

12. Calculation of Fees:

FEES FOR	EXCESS CLAIMS	FEE	AMOUNT DUE
Basic Filing Fee (37 C.F.R. § 1.16(a))			\$760.00
Total Claims in Excess of 20 (37 C.F.R. § 1.16(c))	0	18.00	\$0.00
Independent Claims in Excess of 3 (37 C.F.R. § 1.16(b))	0	78.00	\$0.00
Multiple Dependent Claims (37 C.F.R. § 1.16(d))	0	260.00	\$0.00
Subtotal - Filing Fee Due			\$760.00
	REDUCE BY (%) (\$)		
Reduction by 50%, if Small Entity (37 C.F.R. §§ 1.9, 1.27, 1.28)	0		\$0.00
TOTAL FILING FEE DUE			\$760.00
Assignment Recordation Fee (if applicable) (37 C.F.R. § 1.21(h))	0	40.00	\$40.00
GRAND TOTAL DUE			\$800.00

13. PAYMENT is:

- ☒ included in the amount of the GRAND TOTAL by our enclosed check. A general authorization under 37 C.F.R. § 1.25(b), second sentence, is hereby given to credit or debit our Deposit Account No. 19-0733 for the instant filing and for any other fees during the pendency of this application under 37 C.F.R. §§ 1.16, 1.17 and 1.18.
- ☐ not included, but deferred under 37 C.F.R. § 1.53(f).

14. All correspondence for the attached application should be directed to:

Banner & Witcoff, Ltd.
1001 G Street, N.W.
Washington, D. C. 20001-4597
Telephone: (202) 508-9100
Facsimile: (202) 508-9299

15. Other: _____

Date: October 7, 1999

By: RSK/SSC
Robert S. Katz
Reg. No. 36,402

RSK/SSC/eis

POWER FEED ARRANGEMENT USING AGGREGATE SEGMENTS

Technical Field of the Invention

5 The present invention relates generally to the field of communications in which signals are carried over extended distances. In particular, the present invention relates to undersea communications networks, and the equipment forming such networks. Even more particularly, the present invention relates to the way in which electrical power is supplied to the various components of such communication systems.

Description of the Related Art

10 The ability to transmit data over vast distances has become critical in today's Information Age. Geographic boundaries, such as oceans, are no longer considered to be impediments to communication.

15 In trans-oceanic communication systems, a cable, having sufficient armor and insulation against underwater hazards, is typically laid across the ocean floor, sometimes for hundreds, or even thousands, of miles. At each end, the cable extends out of the ocean, onto land, and eventually into a cable station. In the cable station, the cable is connected to communications equipment that is capable of detecting the various signals
20 transmitted via the cable. These signals are then received, processed, and routed to their final destination using land-based communication networks.

 While the first trans-oceanic networks relied on cables containing metal wire (e.g., copper wire), modern developments in communications technology have yielded a new favorite: the optical fiber. An optical fiber has a much greater transmission capacity

than its metal-based counterparts, and offers many additional advantages as well. For example, optical fiber tends to weigh less than metal wire, and is not susceptible (and does not cause) electromagnetic interference. While optical fiber does have its drawbacks (e.g., limited bend radius, difficulty of splicing), these drawbacks are not usually a problem in undersea networks, which can span hundreds of miles with straightforward routing and minimal post-installation splicing or modification.

Fig. 1a is a schematic diagram that shows a basic point-to-point optical communication segment between two points. Each point has a cable station 101a, 101b that is connected to a cable 102 which contains one or more optical fibers through which optical signals may be sent. Modern optical technology, however, cannot feasibly produce perfect optical fibers, and as a result, optical signal degradation is inevitable. This degradation puts a limit on the length of the optical fibers within cable 102, and typical optical fibers are limited to under 500 km.

Fig. 1b is a schematic diagram that shows a modified point-to-point optical communication segment that employs an optical repeater 103 to extend the range of the optical fibers in cable 102. Optical repeater 103 simply receives incoming wavelengths of light from the optical fibers within a first section 102a of the cable, amplifies the light using, for example, erbium-doped fiber and an optical pump, and then transmits the amplified light using the optical fibers in the next section 102b of the cable. An exemplary optical repeater is the one used in the SL2000 underwater optical system, manufactured by AT&T. Using such a system, a large number of repeaters 103 may be used to extend the range between the two points up to 9,000 km.

The optical repeater 103 requires electrical power to operate, but is not typically located near a power source. To overcome this problem, the repeater 103 receives its electrical power via the cable 102. Fig. 2 shows a cross-section view of a typical optical cable 102. The cable 102 includes one or more layers of insulation or armor 201. Within the cable 102, there may be any number of individual optical fibers 202, each of which has its own insulation, cladding and core (not shown). At the center of the cable 102 is a power conductor 203, and it is this power conductor 203 that supplies the repeater 103 with its power. Other cable designs having data carrying lines, such as optical fibers, and a power conductor have also been used.

Referring to Fig. 3, all of the repeaters 103 along a cable 102 may be powered in series by a constant current supplied on the power conductor 203 of cable 102. This constant current is provided by power feed equipment (PFE) 301a, 301b located at both ends of the cable 102, as shown in Fig. 3. For the AT&T SL2000, a 48 volt battery power source is used to generate a constant current of .92 amps with a maximum voltage of +/- 7500 volts at each PFE 301a, 301b. The power conductor 203 (within cable 102) is connected to a positive terminal at one PFE 301a, and a negative terminal at the other PFE 301b. At each PFE, the terminal that is not connected to the power conductor 203 is connected to a ground potential, typically the ocean itself, to complete the circuit.

As the demand for communications services grows, more and more undersea communication segments are added. These segments may be "non-repeatered," as shown in Fig. 1a, or they may be "repeatered," as shown in Fig. 1b. Each segment is installed having the necessary equipment (PFEs, branching units, repeaters, etc.) to sustain communications between two (or more, if branching units are used) cable stations, such

as cable stations 101a and 101b. This results in power feed configurations such as the one shown in Fig. 4. In the Fig. 4 system, a first undersea communications segment 401 is located between landmasses A and B, and powered by PFEs 403 and 404, while a second segment 402 is located between landmasses B and C, and is powered by PFEs 405 and 406.

The system shown in Fig. 4 provides communication services between inland communication networks on landmasses A, B and C. Unfortunately, the high cost of installing and operating such segments usually limits the number of segments that can be installed. For example, in Fig. 4, landmass D is not connected to any of landmasses A, B and C. Accordingly, there is a need for configurations, methods and systems which reduce the cost of undersea communication segments, and which may allow additional segments to be installed.

Summary of the Invention

The present invention provides a system and method that can reduce the cost of installing and operating communication systems having multiple segments. In a preferred embodiment, two segments connect a first landmass to two other landmasses. On the first landmass, the power conductors of the two segments are coupled to one another, and the two segments are powered by power feed equipment located on the two other landmasses. It may then be possible to power the two segments without using power feed equipment on the first landmass.

In a preferred embodiment of a method of the present invention, communication systems may be designed and installed such that intermediate power feed equipment on

the first landmass described above are not necessary for the two segments. In an alternate embodiment, a new segment being connected to a landmass having an existing power feed equipment can be installed on the landmass without needing a new piece of power feed equipment on the landmass.

5

Summary of the Figures

Figs. 1a and 1b are schematic diagrams that show typical point-to-point communication systems used in the prior art.

Fig. 2 is a cross-section view of a typical optical fiber as used in the prior art.

10

Fig. 3 is a schematic diagram that shows the power feed configuration used in prior art communication networks.

Fig. 4 is a schematic diagram that shows an extended power feed configuration used in prior art communication networks.

Fig. 5 is a simplified view of a first embodiment of the present invention.

15

Fig. 6 is a schematic diagram of an alternate embodiment of the present invention.

Figs. 7a and 7b are simplified views of steps according to a method of the present invention.

Detailed Description of the Preferred Embodiments

20

Fig. 5 is a simplified diagram of the preferred embodiment of the present invention. In Fig. 5, a landmass 501, which may be an island, continent, etc., is shown having inland communication networks 502a and 502b. Communication networks 502a and 502b may include any number of devices that are communicatively coupled for

transmission and/or reception of data signals. Exemplary communication networks 502a and 502b may be telephone networks, cable television networks, computer networks (e.g., the internet), or the like.

The communication networks 502a and 502b are connected, via data signal lines 503a and 503b, respectively, to cable station 504. Within cable station 504, the data signal lines 503a and 503b may be directly coupled to the data signal carrying portions of cables 505a and 505b, respectively. Alternatively, some or all of the data signal lines 503a and 503b may be of a different nature, or carry different signals, from the data signal carrying portions of cables 505a and 505b. For example, the data signal lines 503a and 503b, or a portion thereof, may carry electrical signals, while the corresponding data signal carrying portion of cables 505a and 505b may be optical. In this alternate embodiment, some or all of the data signals will need to be converted, using any known devices for conversion between the two formats for transmission on these lines.

Cables 505a and 505b may be optical in nature, and may have structures similar to that shown in Fig. 2. Cables of different structures may also be used, provided they have a data signal carrying portion and an electrical power carrying portion. The power conductors of cables 505a and 505b may be electrically connected to one another using power connector 506. Power connector 506 may be of any type of conductive wiring or cabling that is acceptable for carrying the electrical power signals carried on the power conductors of cables 505a and 505b. For example, the power connector 506 may be an insulated copper cable of sufficient gauge to carry the current carried on the power conductors of cables 505a and 505b. Alternatively, the power connector 506 may be accomplished using a length of cable identical in cross-sectional structure to the cables

505a and 505b, where the power conductor in this length of cable is used as power connector 506. In a further aspect of this alternate embodiment, the data signal carrying portion of this length of cable may simply be left unused..

If desired, some or all of the data signal carrying portions of cables 505a and 505b may also be connected to one another to allow, for example, communications between communication networks of landmasses A and B. The data signal carrying portions of cables 505a and 505b may also be connected to one another through an additional device, such as a splicer, to allow communication between networks 502a, 502b and any of the networks of landmasses A and B.

From cable station 504, cables 505a and 505b extend out of landmass 501, into the water (sea, ocean, etc.) and eventually to landmasses A and B, respectively. Cable 505a (as well as 505b) need not be a continuous, uninterrupted cable, and may instead be comprised of a number of smaller lengths of cable with devices, such as optical repeaters, connected in between. These devices are not shown in Fig. 5, and for simplicity's sake, cable segment 505a (and 505b) is referred to as a "cable." However, one of ordinary skill in the art of communications will understand that cables 505a and 505b, and the cable segments described herein, may include various devices such as repeaters connected along their lengths.

At landmass A, the data signal carrying portions of cable 505a are connected to a communication network (not shown) located on landmass A. The power conductor of cable 505a may be connected to a positive terminal of power feed equipment 507a. Power feed equipment 507a may be of any commercially available type that is suitable to power devices that may be located along the length of cables 505a and 505b. The

negative terminal of power feed equipment 507a may be connected to a ground, such as the ocean itself.

A similar construction may be used at landmass B, where the data signal carrying portions of cable 505b are connected to a communication network (not shown) located on landmass B, and the power conductor of cable 505b is connected to a negative terminal of power feed equipment 507b, which is similar to power feed equipment 507a. The positive terminal of power feed equipment 507b may also be connected to a ground, such as the ocean itself.

In this configuration, the power feed equipment 507a and 507b form an electrical circuit using the grounds, the cables 505a and 505b, and the power connector 506. This circuit supplies the current needed to power, in series, the various devices (such as optical amplifiers) that may be connected along the length of cables 505a and/or 505b.

In Fig. 5, the cables 505a and 505b may have a common landing point 508, defined by the area in which the cables enter landmass 501. Having a common landing point minimizes the area on landmass 501 that must be accessed, and allows the cables 502a and 502b to be easily routed to cable station 504, within which the power conductors of the cables may be connected to one another.

In an alternate embodiment (shown in Fig. 5b), cables 505a and 505b may have different landing points, and may each enter different cable stations. In such an alternate embodiment, the power connector 506 may need to be routed over portions of landmass 501 to connect the power conductors of cables 505a and 505b. This embodiment, however, may still be preferred over having separate power feed equipment on, for example, opposite sides of an island. The advantages of the preferred embodiment,

however, may still be achieved in this alternate embodiment as long as the power conductors of cables 505a and 505b are electrically connected to one another.

In Fig. 5, communication networks 502a and 502b are shown as being separate from one another. For example, network 502a may be a cable television network that uses cable 505a to supply television programming to customers on landmass A. Network 502b, on the other hand, might be a telephone network that supplies telephone services to residents on landmass B. In this exemplary situation, the two networks 502a and 502b may be different from one another, and might not share any data with one another. However, while the cables used to carry their respective signals (505a and 505b) do not share data signals, they may nevertheless benefit from the preferred embodiments of the present invention by sharing the electrical power used to power segments 505a and 505b.

In an alternative embodiment (not shown), networks 502a and 502b may in fact be connected to one another, and may comprise a single communication network. For example, networks 502a and 502b may both be telephone networks that use a plurality of data signal lines (503a and 503b) to communicate with landmasses A and B. These telephone networks may also be configured to communicate with one another, and as a result, may be considered to be a single communication network on landmass 501.

Using the embodiment shown in Fig. 5, the devices of two cable segments 505a and 505b may be powered by a single pair of power feed equipment 507a and 507b, providing significant savings in installing and operating the communication system using these cable segments. In the prior art system of Fig. 4, the two segments are powered by two pair of power feed equipment (403/404 and 405/406), doubling the pieces of required power feed equipment, and increasing the costs of installation and operation.

Fig. 6 shows another alternate embodiment, in which a plurality of segments 601a, 601b and 601c share a single pair of power feed equipment 602a and 602b. At landmass B, the power conductors of cables 601a and 601b are electrically connected to one another, while at landmass C, the power conductors of cables 601b and 601C are electrically connected to one another. A positive terminal of power feed equipment 602a is electrically connected at landmass A to one end of cable 601a, while a negative terminal of power feed equipment 602b is connected at landmass D to an end of cable 601c. Landmasses B and C, however, do not need separate power feed equipment to power segments to which they are connected. Instead, they merely need power connectors 603a and 603b to connect the various power conductors of their respective cables. It will be readily understood by those skilled in the art of communications that a large number of segments may be "chained" together in this fashion. Each segment in such a "chain" need only have their power conductors connected to allow, for example, electrical current used to power devices located along the various segments 601a, 601b, and 601c. The data signal carrying portions, or lines, of these segments (such as the optical fibers in the cables) need not be connected to one another, and may in fact be isolated from one another.

Figs. 7a and 7b are basic diagrams that show a method according to an exemplary embodiment of the present invention. In Fig. 7a, the power conductor of an existing segment 701a is shown, where cable 701a connects the communication networks of landmasses A and B (not shown). The power conductor of cable 701a is connected to a positive terminal at power feed equipment 702a on landmass A, and a negative terminal

at power feed equipment 702b on landmass B. It is then desired to connect the communication network(s) of landmass C to those of A, B, or both.

In Fig. 7b, an additional cable 701b having a power conductor is installed between landmasses B and C. An additional piece of power feed equipment 702c is installed at landmass C to provide a negative voltage connection for cable 701b, while power feed equipment 702b is disconnected from the power conductor of cable 701a. Power feed equipment 702b might be removed, sold, and/or otherwise disposed of as being no longer needed. In an alternative embodiment, power feed equipment 702b might be removed, modified, and installed on landmass C to serve as power feed equipment 702c.

The power conductor of cable 701a is electrically connected to the power conductor of cable 701b. When segment 701b is installed, the current supplied by power feed equipment 702a and 702c must be used by more devices than before, to account for the devices, such as optical repeaters, that may be connected along segment 701b. Accordingly, it may be necessary to modify power feed equipment 702a when segment 701b is installed. The exact modifications will depend on the particular model of power feed equipment used at 702a, and will be understood by those of ordinary skill in the art of communication systems.

As shown in Figs. 7a and 7b, and as described above, an additional segment may be installed using the present invention while only adding a single additional power feed equipment. An additional piece of power feed equipment may not even be needed if an existing piece of power feed equipment can be modified and transferred. This provides significant cost savings in expanding and operating communication systems.

A preferred embodiment, along with several alternative embodiments, has been described above. However, it will be readily understood by one of ordinary skill in the art that one or more of the advantageous features of these various embodiments may be rearranged and combined to form various alternate embodiments that are based on the
5 teachings disclosed herein. To determine the proper scope of the present invention, reference should be made to the appended claims.

In the Claims

I claim as my invention:

1. A system for providing communications between communication devices located on different landmasses, comprising:

first and second cables, wherein each of said first and second cables further comprises one or more data signal carrying lines and an electrical power conductor, wherein said first cable carries data signals between communication devices of a first landmass and a second landmass, and said second cable carries data signals between communication devices of the first landmass and a third landmass; and

an electrical power connector connecting said electrical power conductors of said first and second cables so that electrical current can flow between said power conductors of said first and second cables.

2. The system of claim 1, further comprising:

a first piece of power feed equipment having positive and negative terminals, located on the second landmass, wherein said positive terminal of said first piece of power feed equipment is electrically connected to said electrical power conductor of said first cable; and

a second piece of power feed equipment having positive and negative terminals, located on the third landmass, wherein said negative terminal of said second piece of power feed equipment is electrically connected to said electrical power conductor of said second cable.

3. The system of claim 2, wherein said negative terminal of said first piece of power feed equipment and said positive terminal of said second piece of power feed equipment are electrically connected to a ground potential.

4. The system of claim 1, wherein said first and second cables carry optical signals, and each includes one or more optical repeaters.

5. The system of claim 1, wherein an end of said first cable, and an end of said second cable, enter onto a first landmass at a common landing point.

6. The system of claim 5, wherein said ends of said first and second cables are routed to a cable station, and said electrical power connector is located in said cable station.

7. The system of claim 6, further comprising a first plurality of data signal carrying lines, communicatively coupled to said one or more data signal carrying lines of said first cable, and further communicatively coupled to a communication device of a first communication network located on the first landmass.

8. The system of claim 7, wherein said first plurality of data signal carrying lines carries electrical data signals, said one or more data signal carrying lines of said first cable carries optical data signals, and said first plurality of data signal carrying lines and

said one or more data signal carrying lines of said first cable are communicatively coupled using a converter for converting between optical and electrical signals.

9. The system of claim 1, wherein said signal carrying lines of said first cable are communicatively isolated from said signal carrying lines of said second cable.

10. The system of claim 1, wherein said signal carrying lines of said first cable carry different signals from signals carried on said signal carrying lines of said second cable.

11. A communication system, comprising:

a first cable station located on a first landmass, having a first piece of power feed equipment;

a second cable station located on a second landmass, having a second piece of power feed equipment;

a plurality of cable segments, each connecting communication networks of two landmasses, wherein each of said plurality of cable segments includes an electrical power conductor and one or more data signal carrying lines, and wherein said electrical power conductors of said plurality of cable segments are electrically connected in series between a positive terminal of said first piece of power equipment and a negative terminal of said second piece of power feed equipment.

12. The system of claim 11, wherein one of said plurality of cable segments includes a device powered by an electrical current carried on said electrical power conductor of said one of said plurality of cable segments.

13. The system of claim 12, wherein said device is an optical repeater, and one of said data signal carrying lines within said one of said plurality of cable segments is an optical fiber.

14. The system of claim 11, wherein the data signal carrying lines of one of said plurality of cable segments includes a plurality of continuous optical fibers.

15. The system of claim 11, wherein said data signal carrying lines of said plurality of cable segments are not connected in series between said first and second cable stations.

16. A method for modifying an existing communication system, wherein the existing communication system includes a first underwater cable carrying signals away from a first landmass, wherein the first underwater cable includes an electrical power conductor connected to a piece of power feed equipment on the first landmass for providing electrical power to one or more devices connected to the first underwater cable, comprising the steps of:

disconnecting a first end of the electrical power conductor of the first underwater cable from the piece of power feed equipment on the first landmass; and

connecting the first end of the electrical power conductor of the first underwater cable to an electrical power conductor of a second underwater cable, wherein the second underwater cable carries signals away from the first landmass.

17. The method of claim 16, further comprising the step of modifying a third piece of electrical power feed equipment that is electrically connected to the electrical power conductor of the first underwater cable, wherein said step of modifying allows the second and third pieces of power feed equipment to provide electrical power to one or more devices connected along lengths of the first or second cables.

18. The method of claim 16, further comprising the step of relocating the piece of power feed equipment on the first landmass from the first landmass to the third landmass.

19. The method of claim 16, further comprising the step of maintaining isolation between data signal carrying portions of the first and second cables.

Abstract

A power feed arrangement for aggregate segments of a communications system is disclosed. In embodiments of the invention, cables are used to communicatively connect a number of landmasses, where the cables also serve to carry electrical power to devices connected along lengths of the cables. A first cable is connected to first and second landmasses, while a second cable is connected to second and third landmasses. On the second landmass, the electrical power conductors of the first and second cables are electrically connected to one another, and pieces of power feed equipment located on said first and third landmasses are used to supply electrical power to devices located along lengths of the first and second cables. Alternative embodiments are also disclosed.

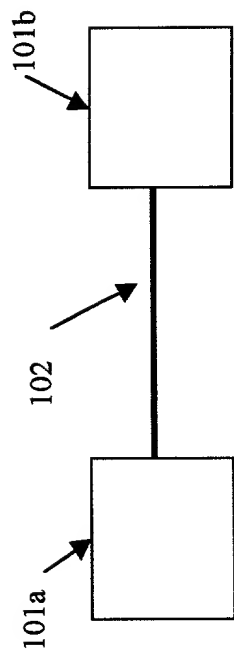


Fig. 1a
(Prior Art)

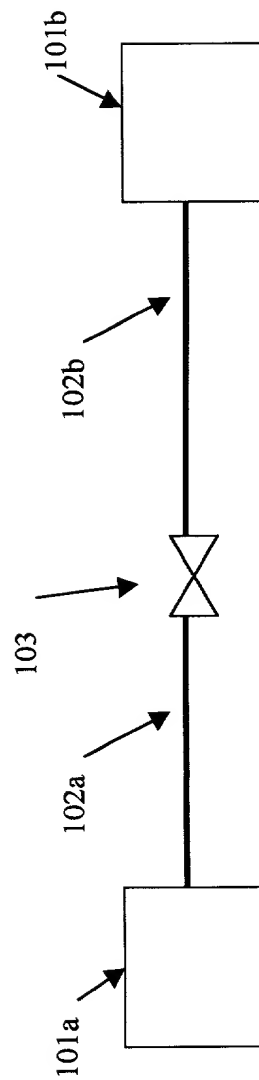


Fig. 1b
(Prior Art)

102

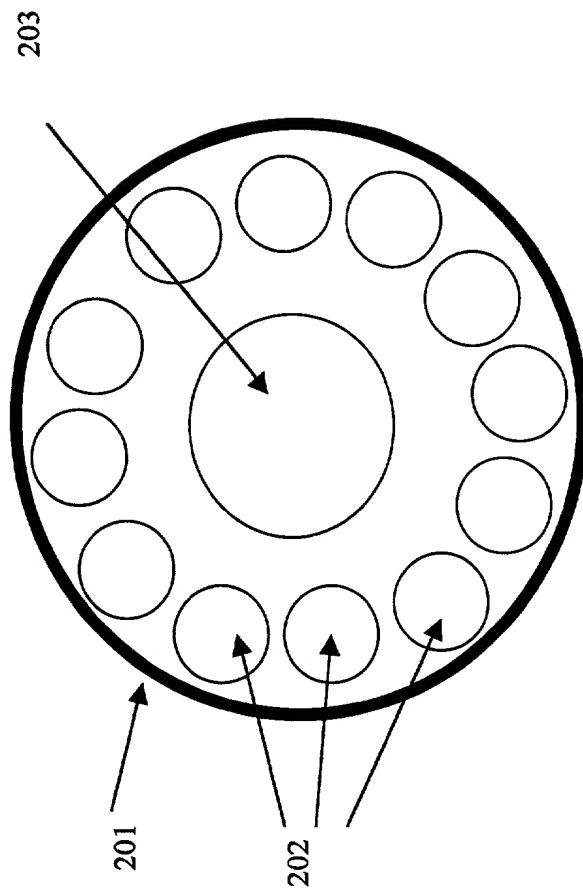


Fig. 2
(Prior Art)

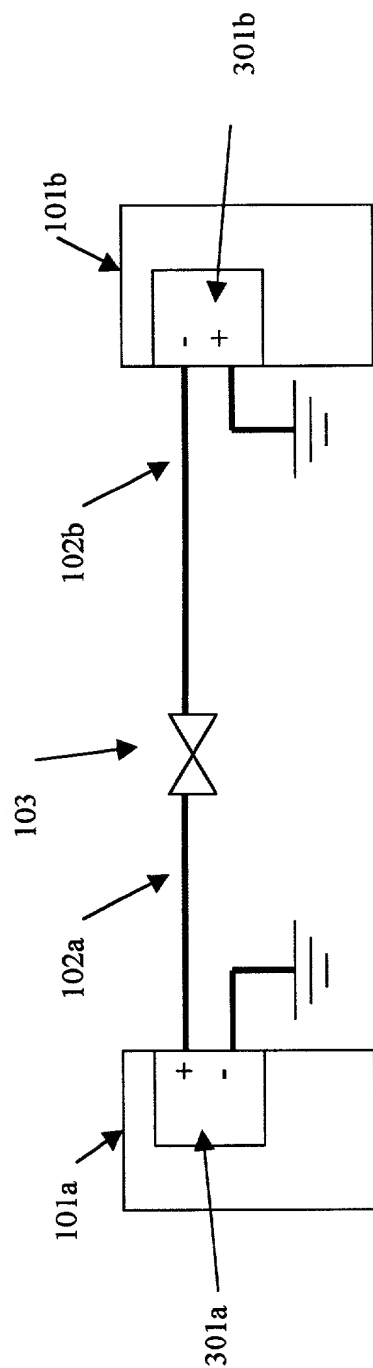


Fig. 3
(Prior Art)

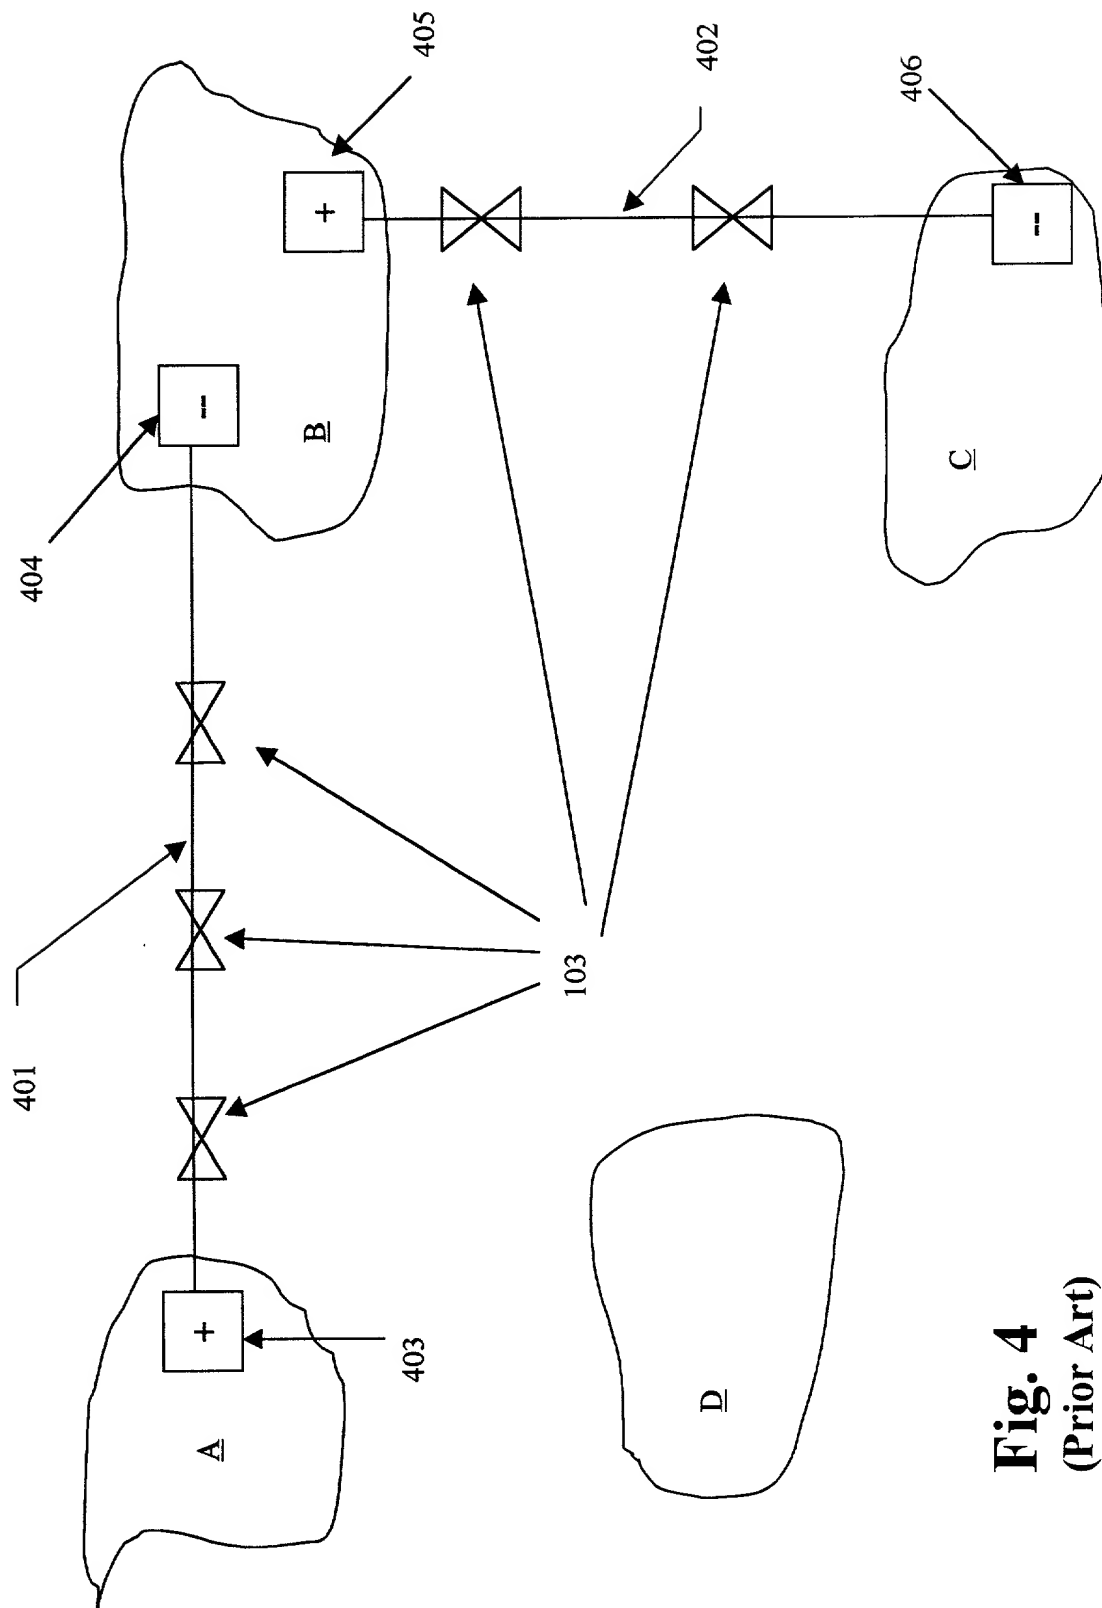


Fig. 4
(Prior Art)

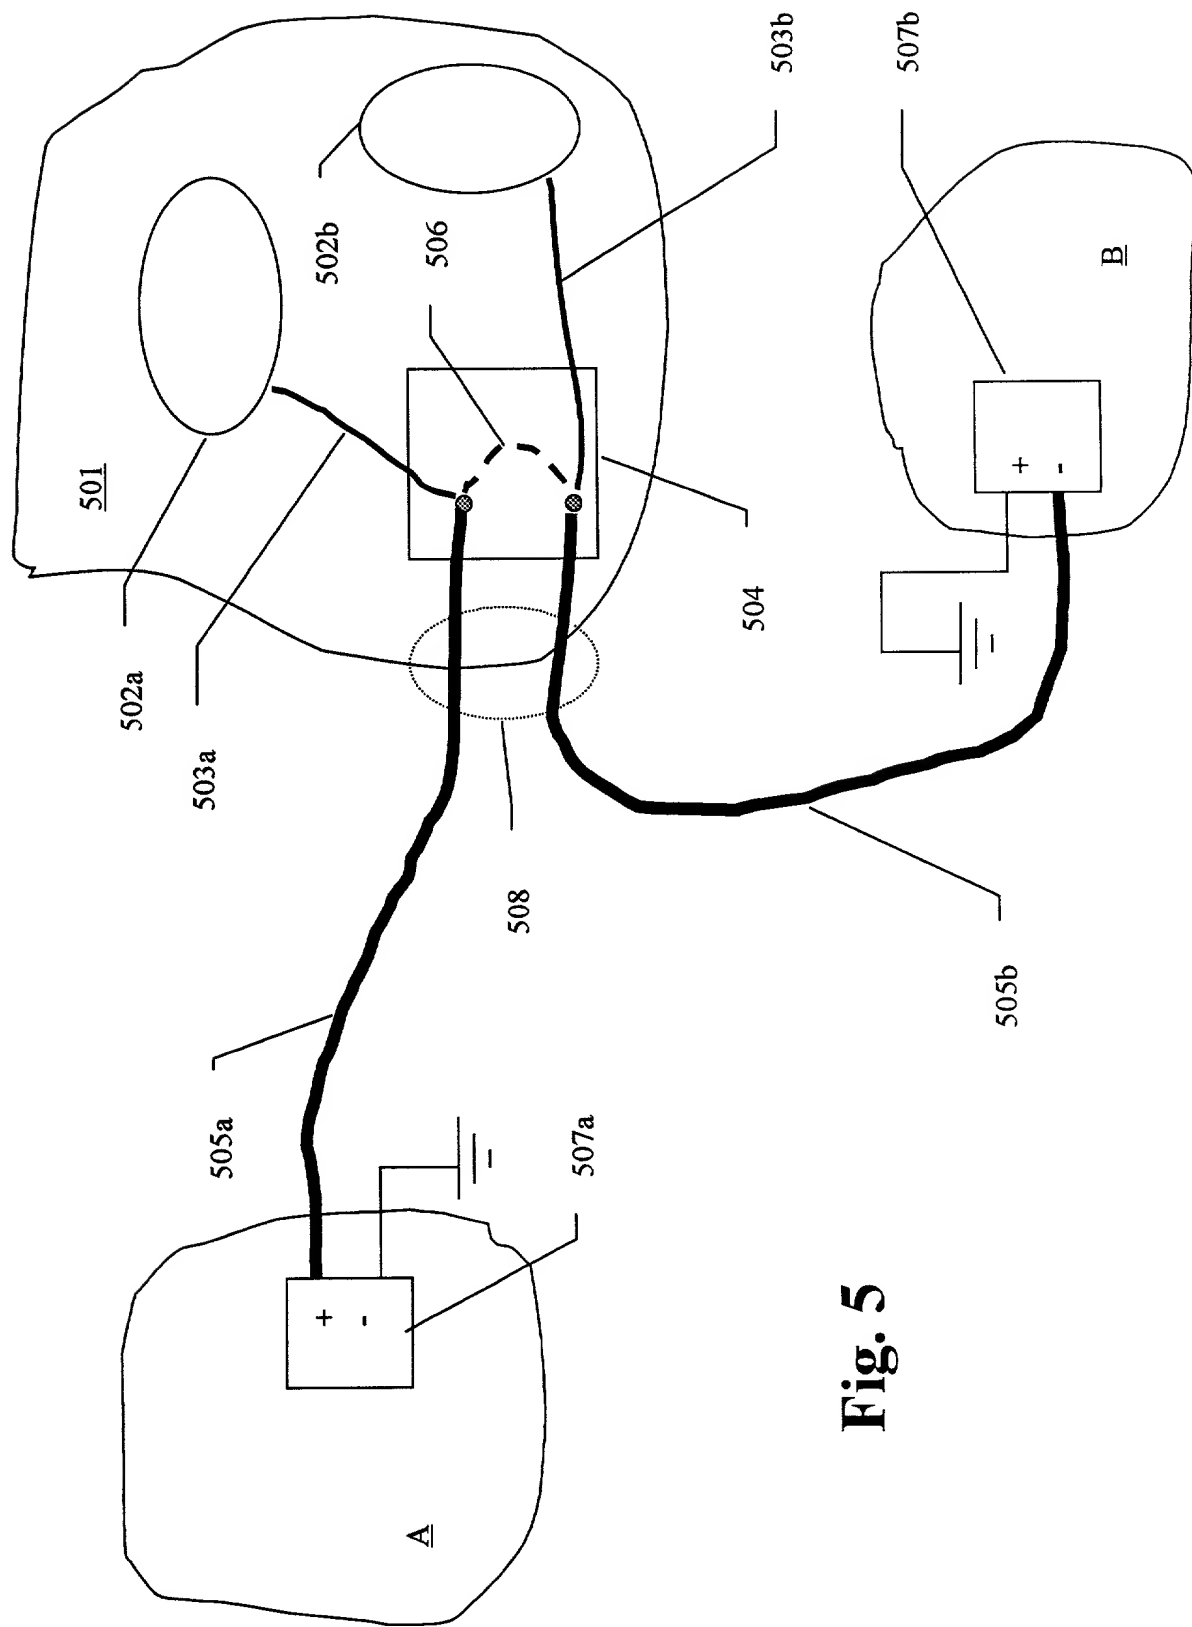


Fig. 5

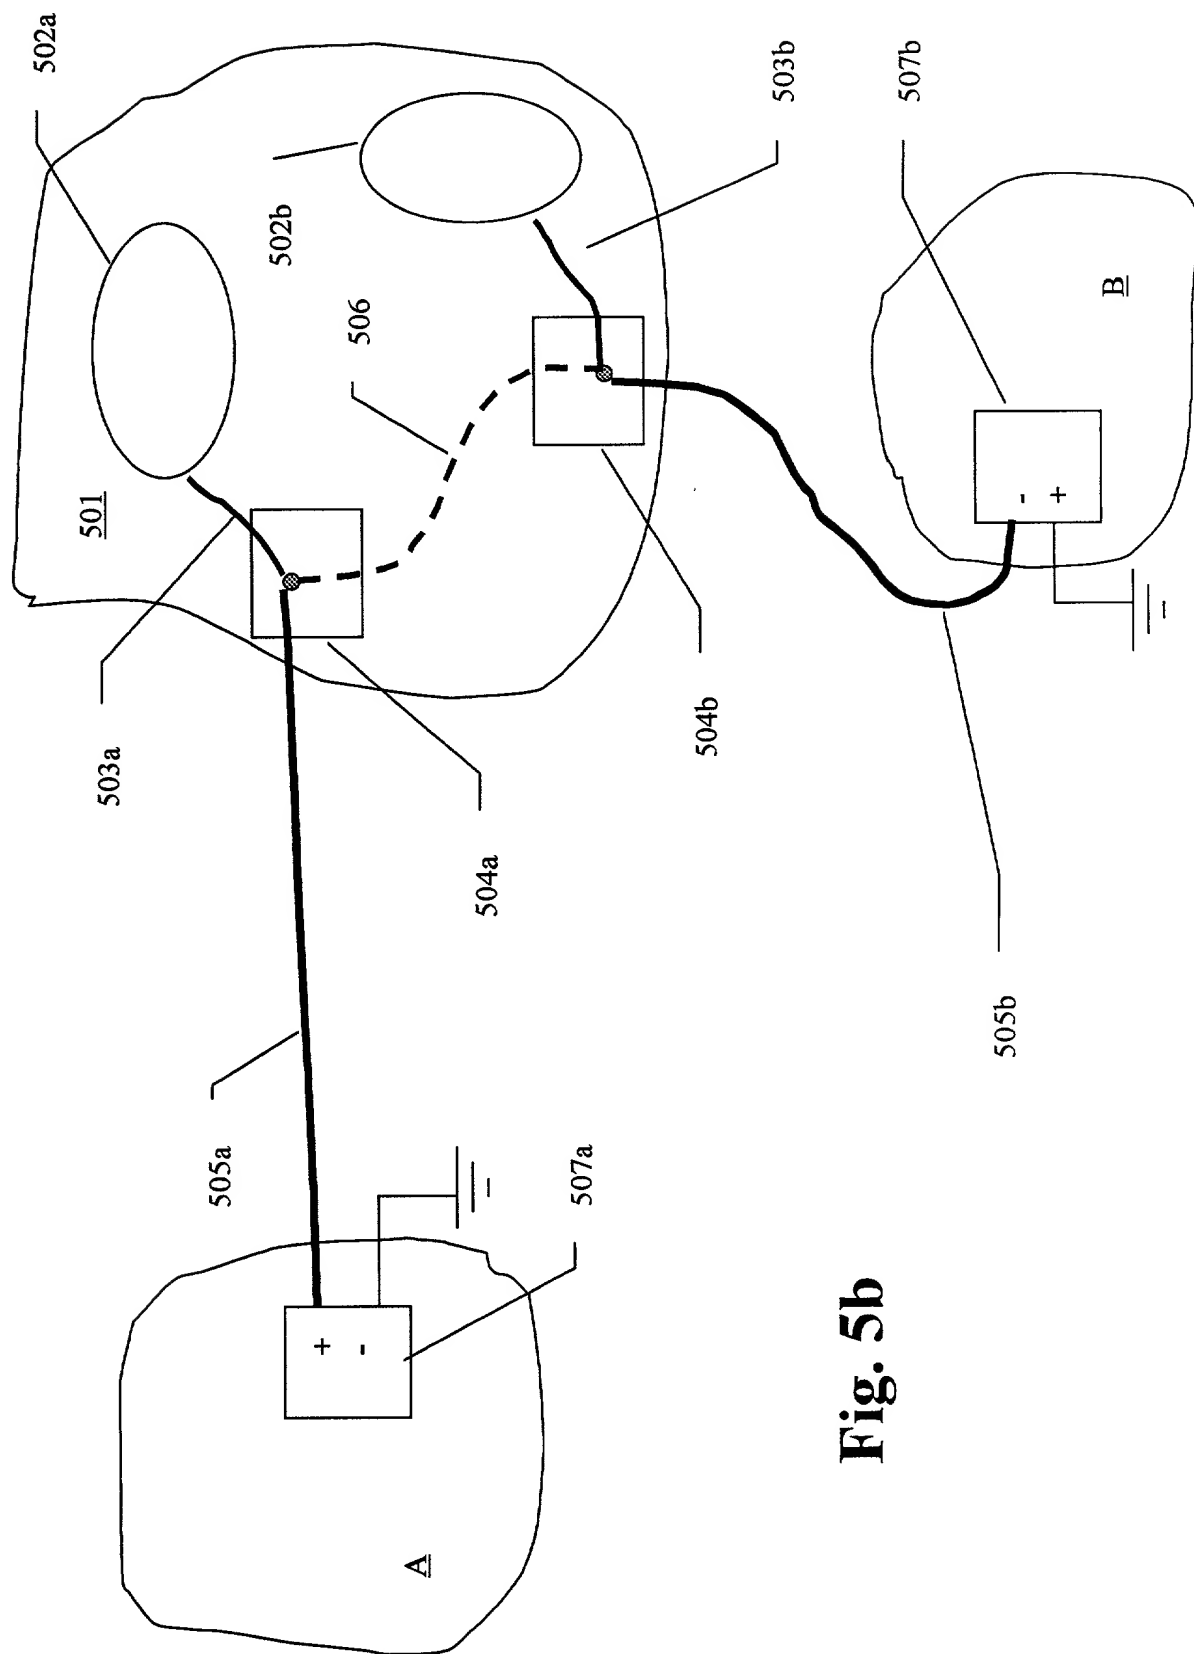


Fig. 5b

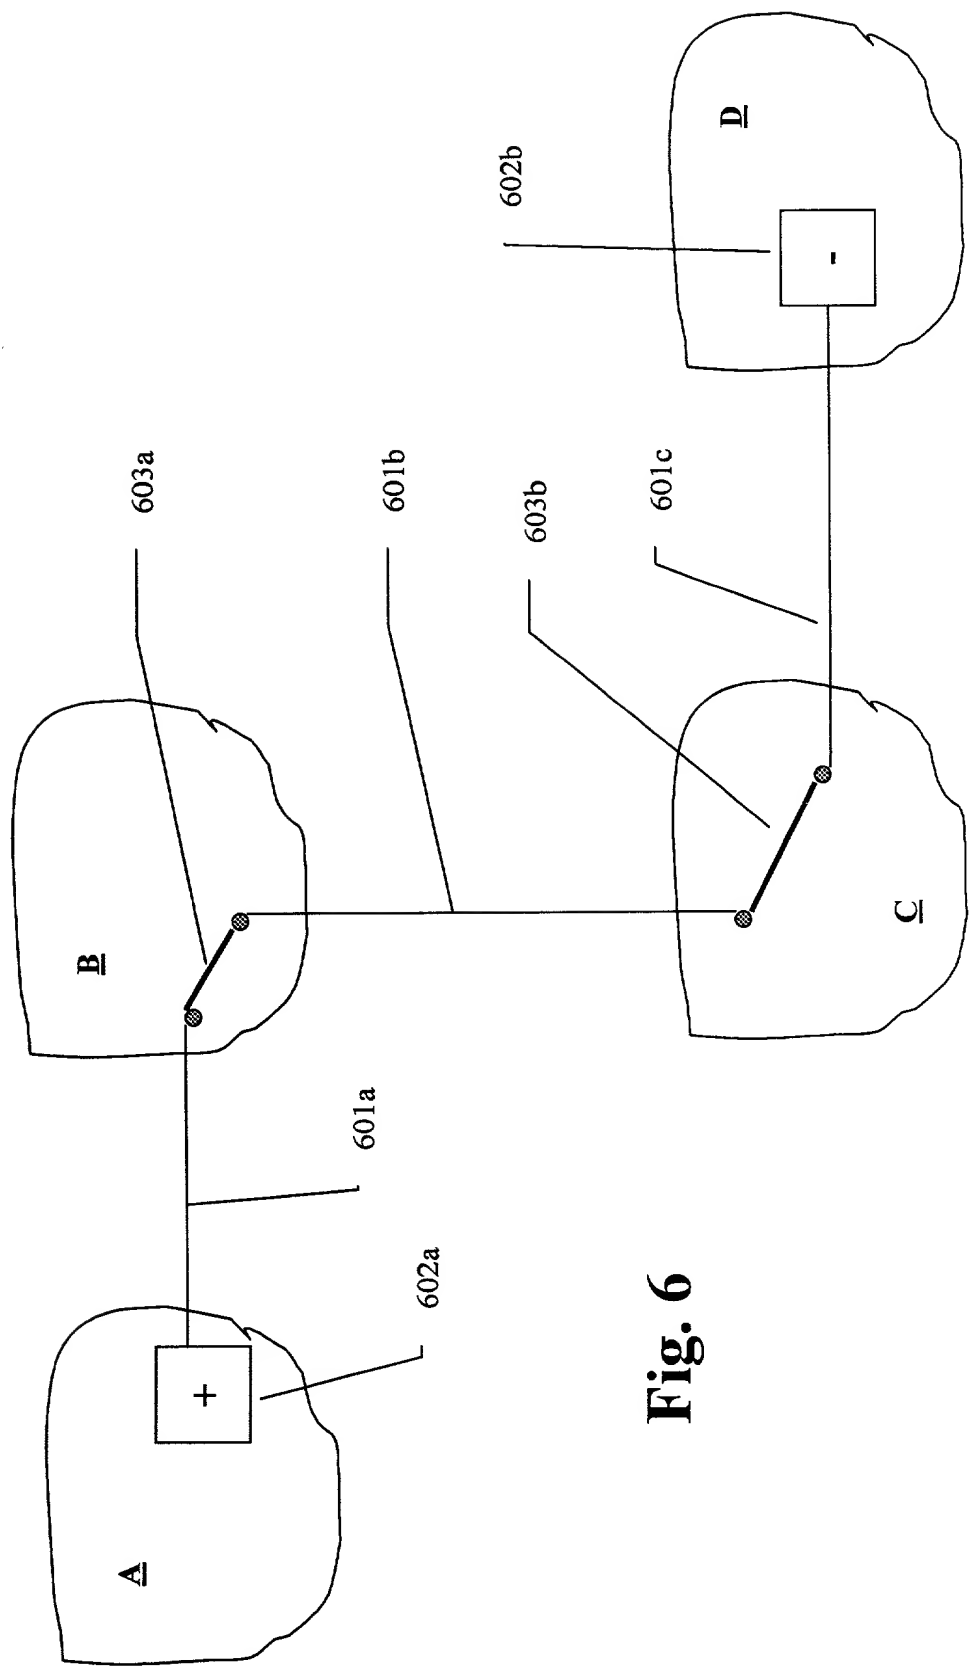


Fig. 6


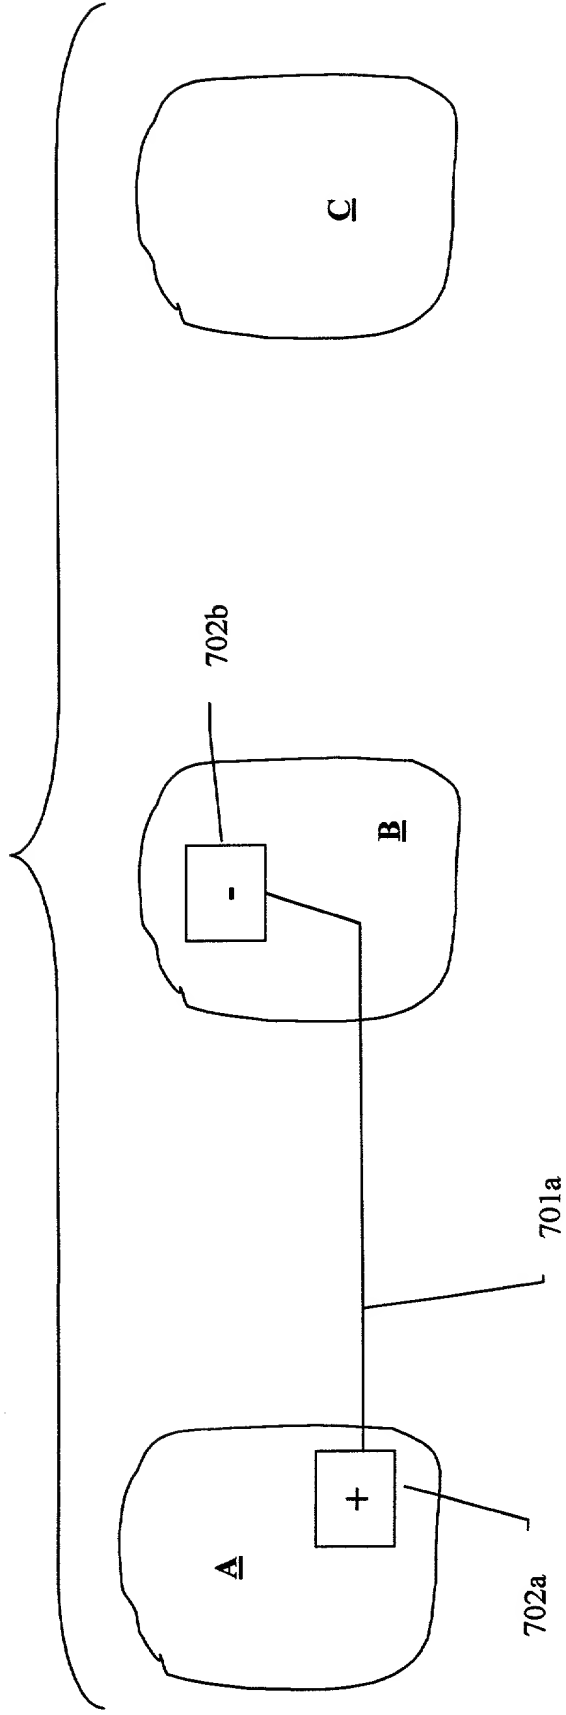


Fig. 7a

Fig. 7b

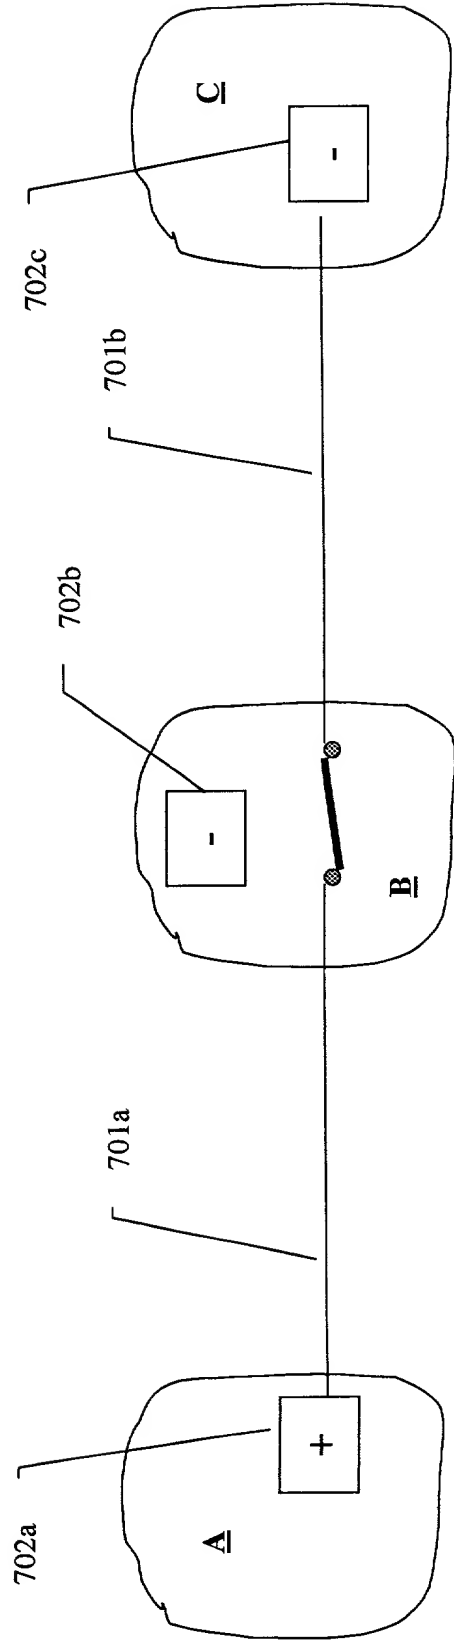

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Declaration and Power of Attorney

As the below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

POWER FEED ARRANGEMENT USING AGGREGATE SEGMENTS

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by an amendment, if any, specifically referred to in this oath or declaration.

I acknowledge the duty to disclose all information known to me which is material to patentability as defined in Title 37, Code of Federal Regulations, 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, 119 of any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

None

I hereby claim the benefit under Title 35, United States Code, 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, 112, I acknowledge the duty to disclose all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application:

None

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

I hereby appoint the following attorneys with full power of substitution and revocation, to prosecute said application, to make alterations and amendments therein, to receive the patent, and to transact all business in the Patent and Trademark Office connected therewith:

Mark K. Young, Registration No. 38,666; Brian K. Dinicola, Registration No. 36,122; and the Attorneys of Banner & Witcoff, LTD.: Donald W. Banner, Registration No. 17,037; Harold J. Birch, Registration No. 16,527; Edward F. McKie, Jr., Registration No. 17,335; William W. Beckett, Registration No. 18,262; Dale H. Hoscheit, Registration No. 19,090; Joseph M. Potenza, Registration No. 28,175; James A. Niegowski, Registration No. 28,331; Joseph M. Skerpon, Registration No. 29,864; Thomas L. Peterson, Registration No. 30,969; Nina L. Medlock, Registration No. 29,673; William J. Fisher, Registration No. 32,133; Thomas H. Jackson, Registration No. 29,808; Gary D. Fedorochko, Registration No. 35,509; Robert S. Katz, Registration No. 36,402; Daniel E. Fisher, Registration No. 34,162; Kevin A. Wolff, Registration No. 42,233 and Steve S. Chang, Registration No. 42,402.

Please address all correspondence to Robert S. Katz, Esq., Banner & Witcoff, LTD., 1001 G Street N.W., Eleventh Floor, Washington, D.C. 20001-4597. Telephone calls should be made to: **Banner & Witcoff** by dialing Area Code 202-508-9100.

Atty Docket No.: 04787.81749
(TSSL Case No.: Trischitta-4)

Full name of sole inventor: Patrick Ross Trischitta

Inventor's Signature

Patrick Ross Trischitta

Date

October 1, 1999

Residence: 56 Line Rd., Holmdel NJ 07733

Citizenship: USA

Post Office Address: Same as Above